

Compact shape and silent movement, made of strong die-cast aluminum and UV resistant covers

Optional unlock from the outside

Simplified adjustment of the on-board mechanical limit switches as standard



Even more compact size: installation height just 5 cm from ground level

## NIGHT LIGHT SYSTEM

Concept that combines the comfort of an automatic gate with the use of LED lighting to illuminate your entrance over night

- + SAFETY
- + COMFORT
- + SAVING

Ease the night vision  
Defines the driveway passage during the night  
Allows lower power consumption

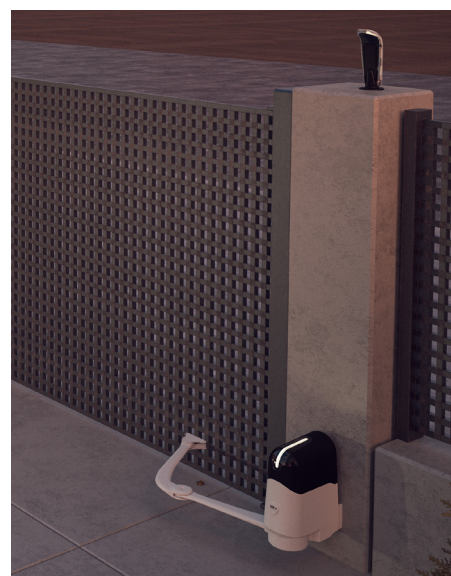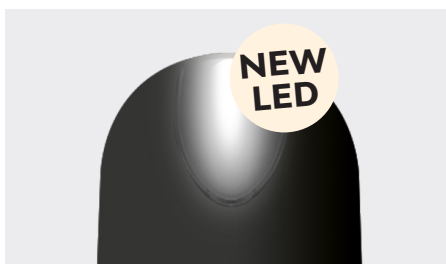


## MODELS


CODE	DESCRIPTION	PCS PALLET
<b>REP2024</b>	For swing gates with maximum length 2,3 m or weight 250 kg per leaf, 24 Vdc motor. Residential use	5
<b>REP2024S</b>	For swing gates with maximum length 2,3 m or weight 250 kg per leaf, 24 Vdc motor. Without control unit. Residential use	5

INDICATES PRODUCTS WITH DELIVERY DATES WITHIN 6 WEEKS

## DIMENSIONS

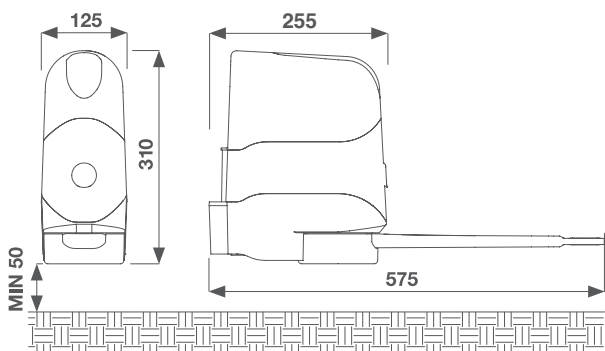

A min	100
C max	200
D min	450




## TECHNICAL DATA

		REP2024	REP2024S
<b>MECHANICAL DATA</b>			
torque	Nm	120	120
cycles/hour *	%	30	30
opening time at 90°	sec	14-20	14-20
<b>ELECTRICAL DATA</b>			
control board		14A	-
power	Vac	230	-
	Vdc	-	24
consumption	A	0,6	2
absorbed power	W	115	50
integrated lights		yes	yes
<b>GENERIC DATA</b>			
protection degree	IP	44	44
dimensions (L - D - H)	mm	125 - 255 - 310	125 - 255 - 310
weight	kg cad	13	10
working temperature	°C	-20 + 55	-20 + 55
leaves maximum weight	kg	250	250

\* The cycles now indicated are intended with a non-paneled door at an ambient temperature of 20 °C.

## LIMIT USE

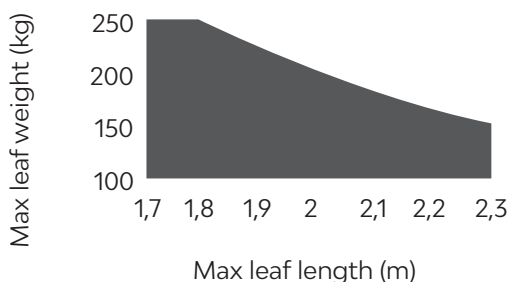

Gate shape and height and weather conditions can considerably reduce the values shown above, in the graph.

## ACCESSORIES

 <p><b>ELS-C</b> 12 V horizontal electric lock. Up to 2000 kg</p> <p>PC 1</p>	 <p><b>KBPN</b> Kit of 1.3 Ah lead battery and battery charger</p> <p>PC 1</p>	 <p><b>KC</b> Unlock key cylinder</p> <p>PC 1</p>	 <p><b>REV1</b> Slide arm</p> <p>PC 1</p>	 <p><b>REV2</b> Arm for reduced openings</p> <p>PC 1</p>
 <p><b>REV3</b> External release unlock kit</p> <p>PC 1</p>	 <p><b>BMET</b> Metal box with release system</p> <p>PC 1</p>	 <p><b>550CABL045A00 *</b> Special cable for Eclipse flash light RG174 50 Ohm + 4 x 0,50 mm<sup>2</sup> (100m)</p> <p>PC 1</p>	 <p><b>DYL</b> Programming module Cable length 120 cm (only 14A board)</p> <p>PC 1</p>	 <p><b>KUBEPRO</b> Wireless programming module</p> <p>PC 1</p>
 <p><b>KUBE</b> Wireless controlling module for end user</p> <p>PC 1</p>				

\* it is not recommended to use a connection longer than 4 m to avoid sensible loss of reach